HARDENER TUNNEL (BRINE LINE)

BREEZE-S

It is a linear and compact HARDENER tunnel, specially designed to fit our Brine Freezing Lines SAL-SHOWER and SAL-SHOWER-ECO.

A high performance tunnel thanks to:

- A cooling power calculated according to the needs.
- Long working period, 14-16h without defrosting.
- Anti-corrosion stainless steel conveyor belt and sprockets.
- High resistance materials

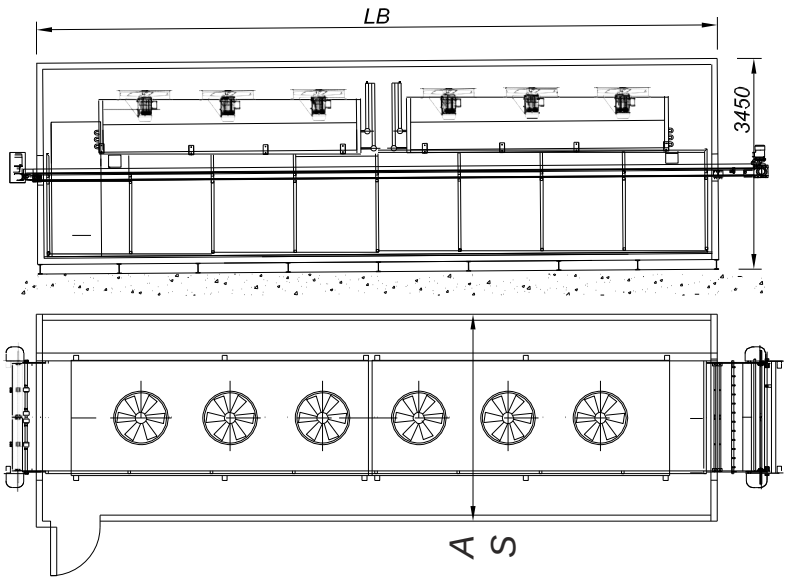

FEATURES BREEZE-S			
PRODUCTION	**COOLING POWER NEEDS**		**EVAPORATION TºC**
	Kcal/h.	**Kw.**	**ºC.**
1000 Kg/h	35.000	40,5	-45ºC
1500 Kg/h	43.000	50	-45ºC
2000 Kg/h	60.000	65	--45ºC
3000 Kg/h	69.000	80	-45ºC
4000 Kg/h	90.000	105	-45ºC
5000 Kg/h	108.000	125	-45ºC
6000 Kg/h	129.000	150	-45ºC

(*) The cooling capacity will be specified according to the product to be frozen. Example: SHRIMP

Pol. Ind. Riu Ripoll Sud
Riu Ripoll, 28 - 08202 Sabadell, Barcelona.

Tel +34 937 80 00 03 E-mail: info@palinox.com

Tel +34 607 490 591
E-mail: recambios@palinox.com