




Compact equipment for small and medium productions with a load capacity of up to 300 kg/hr.

It is a fast defrosting with very low water consumption. The baskets are introduced inside the cabinet with a stainless steel pallet and a shower with an important water flow is generated by means of a pumping equipment. It includes a system of temperature maintenance by electrical resistance and thermal oil.

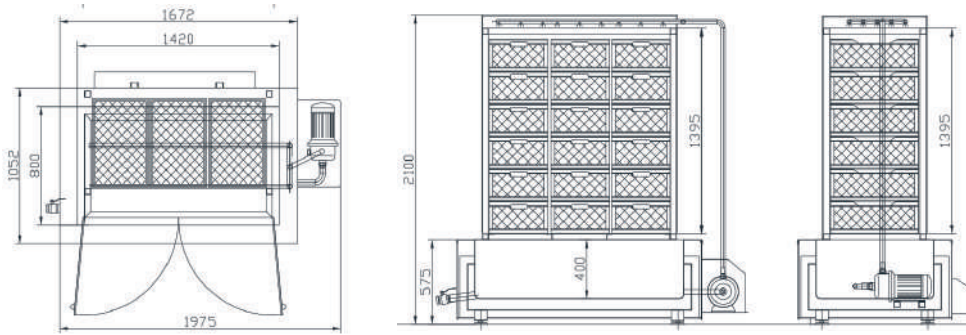

MODEL	DS-ARM
GENERAL FEATURES	
AISI 304 stainless steel construction	YES
Connection 380V (III+N+PE) 50/60 Hz	YES
Moisture protection (IP-65)	YES
Water inlet	YES
High flow constant shower system	YES
Thermal oil chamber and electrical resistors	YES
Automatic temperature control	YES
Low water consumption	YES
PVC drain valve	YES
Clean cut without waste	YES

MODEL	DS-ARM
ELECTRICAL POWERS AND DIMENSIONS	
ELECTRICAL POWER NEEDS (Kw)	7,5
Heating capacity (kw)	12
Capacity (Its)	300
Water pipe diameter (")	1
Maximum weight (Kg)	800

(*) Dimensions and power ratings are generic and subject to change based on actual needs.

