




It is a compact equipment in stainless steel AISI316 of very high performance for Immersed cooling in water with temperature control.

The product is introduced into perforated baskets (CC COC) inside a stainless steel structure by means of an air hoist (ES- INOX-6 / ES-INOX-12C).

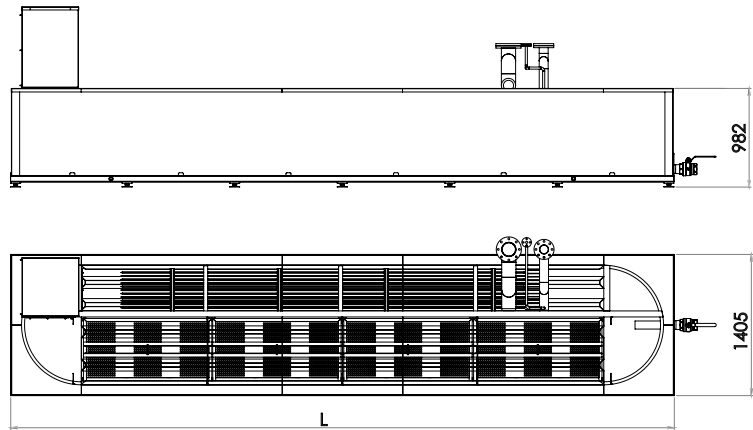

CARACTERISTIQUES TECHNIQUES	EN-INM-2C	EN-INM-3C	EN-INM-4C
Robust AISI 316 stainless steel construction	Yes	Yes	Yes
Connection 380V (III+N) 50/60 Hz	Yes	Yes	Yes
Protection against moisture (IP- 65)	Yes	Yes	Yes
Thermal insulation of the refractory material tank	Yes	Yes	Yes
High water circulation speed driven by a powerful agitator	Yes	Yes	Yes
Stainless steel plate heat exchanger. AISI 316	Yes	Yes	Yes
Lift system	Not incl.	Not incl.	Not incl.
Number of structures (single/double)	2	3	4
Total power(Kw)	6	7	8
Angular motorspeed (RPM)	1.410	1.410	1.410
Calorific power according to the product	To be consulted	To be consulted	To be consulted
Capacity (Liters))	3.500	4.000	4.500
Maximum weight (Kg)	1.500	1.750	2.000

(*) Dimensions and powers are generic and subject to modifcaons according to real needs.

